




## SAPPHIRE Series

# M-156-4 ver.F

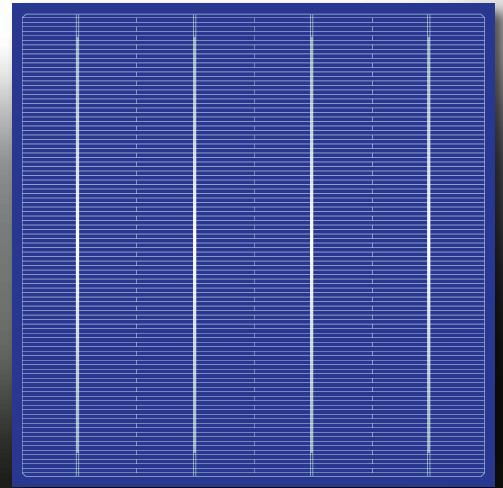

## Multicrystalline Solar Cell

### Features

- High-efficiency solar cells with an isotropically etched surface
- Silicon nitride anti-reflection coating
- Silver front contact bars and full surface aluminum back contact field

### Performance and Quality

- Proper handling from incoming inspection through production, outgoing inspection and packaging
- 100% checked for reverse current and visual appearance
- Calibrated against Fraunhofer ISE
- RoHS compliance
- **100% PID Resistance**


### Packaging

- Minimize the risk of broken cells with special design
- Label with product information

### Physical Characteristics

Dimension	156.75 mm x 156.75 mm ± 0.3 mm
Thickness (si)	180 μm - 20 / + 30 μm 200 μm ± 30 μm
Front Side (-)	Silicon nitride anti-reflection coating 1.1 mm silver busbar
Back Side (+)	Full surface aluminum back surface field 2.0 mm (silver) discontinuous soldering pads

### Cell Layout

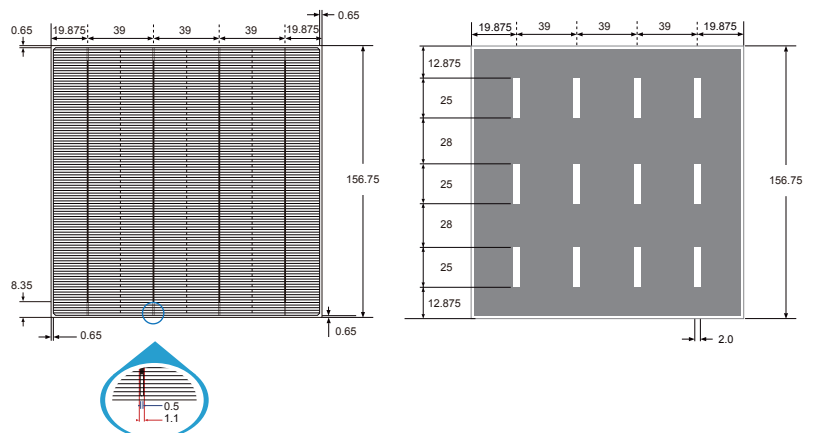



# M-156-4 ver.F

## Multicrystalline Solar Cell



**Solartech**  
Energy Corp.

### Electrical Characteristics

Class	Efficiency Range (%)	Rated Power (Wp)	*Maximum Power Current (A)	*Short Circuit Current (A)	*Maximum Power Voltage (V)	*Open Circuit Voltage (V)
186	18.6-18.7	4.570	8.518	9.048	0.533	0.634
187	18.7-18.8	4.595	8.547	9.077	0.535	0.636
188	18.8-18.9	4.619	8.577	9.107	0.536	0.637
189	18.9-19.0	4.644	8.606	9.136	0.538	0.638
190	19.0-19.1	4.668	8.636	9.165	0.539	0.639
191	19.1-19.2	4.693	8.665	9.194	0.541	0.641
192	19.2-19.3	4.718	8.695	9.224	0.542	0.642
193	19.3-19.4	4.742	8.724	9.253	0.543	0.643
194	19.4-19.5	4.767	8.757	9.286	0.545	0.645
195	19.5-19.6	4.791	8.786	9.316	0.546	0.646
196	19.6-19.7	4.816	8.810	9.339	0.548	0.647
197	19.7-19.8	4.840	8.840	9.368	0.549	0.648
198	19.8-19.9	4.865	8.869	9.398	0.550	0.649

Test condition : 1000 W / m<sup>2</sup>, AM 1.5, 25°C      Power measuring tolerance: ±1.5% rel.


### Temperature coefficients

Current (%/K)	0.0425
Voltage (%/K)	-0.3111
Power (%/K)	-0.3960


### Light Intensity Dependence

Intensity (W/m <sup>2</sup> )	Vmpp(%)	Imp(%)
1000	100.0	100.0
900	99.7	90.4
500	97.5	49.9
300	95.2	29.7
200	92.7	19.5

### IV-Curve

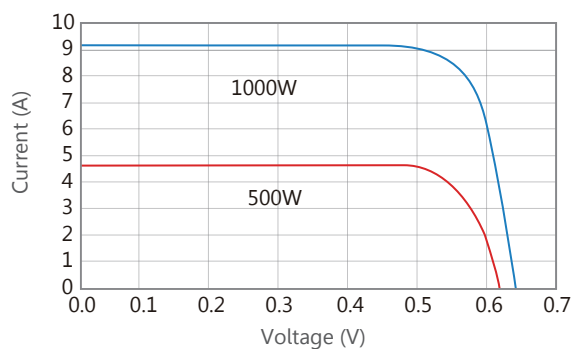

### Spectral Response

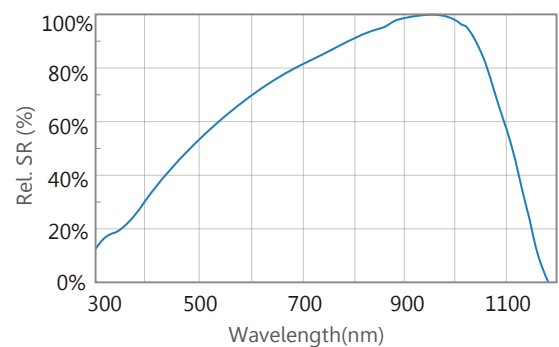

## Solartech Energy Corp.



Taipei Office  
8F., No.760, Sec. 4, Bade Rd., Songshan Dist., Taipei 105, Taiwan  
Tel: +886-2-21712388 Fax: +886-2-21712387  
E-mail: sales@solartech-energy.com

Hsinchu HQ & Fab  
No.16, Guangfu N. Rd., Hsinchu Industrial Park, Hukou, Hsinchu 303, Taiwan  
Tel: +886-3-5276888 Fax: +886-3-5276866