


## SAPPHIRE Series

# M-156-5 ver.B

## Multicrystalline Solar Cell

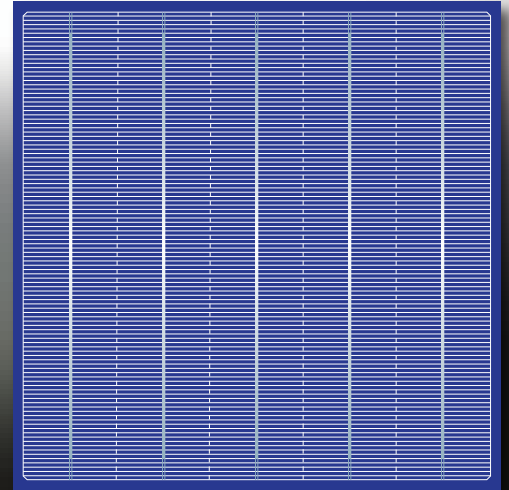

### Features

- High-efficiency solar cells with an isotropically etched surface
- Silicon nitride anti-reflection coating
- Silver front contact bars and full surface aluminum back contact field

### Performance and Quality

- Proper handling from incoming inspection through production, outgoing inspection and packaging
- 100% checked for reverse current and visual appearance
- Calibrated against Fraunhofer ISE
- RoHS compliance
- **100% PID Resistance**


### Packaging

- Minimize the risk of broken cells with special design
- Label with product information

### Physical Characteristics

Dimension	156.75 mm x 156.75 mm ± 0.3 mm
Thickness (si)	180 μm - 20 / + 30 μm 200 μm ± 30 μm
Front Side (-)	Silicon nitride anti-reflection coating 0.7 mm silver busbar
Back Side (+)	Full surface aluminum back surface field 2.0 mm (silver) discontinuous soldering pads

### Cell Layout

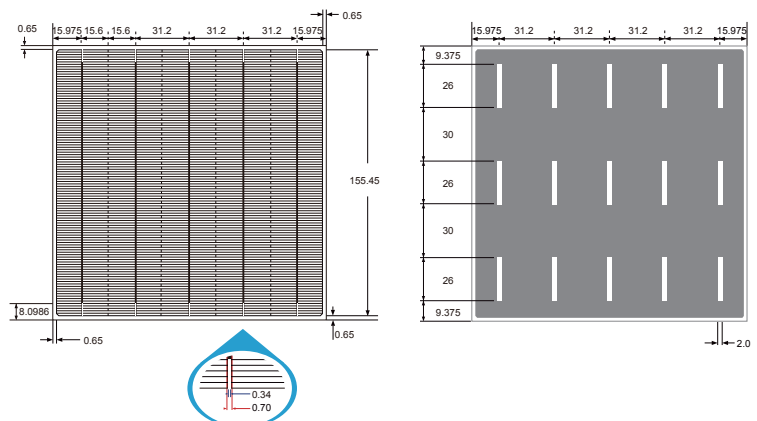



# M-156-5 ver.B

## Multicrystalline Solar Cell



**Solartech**  
Energy Corp.

### Electrical Characteristics

Class	Efficiency Range (%)	Rated Power (Wp)	*Maximum Power Current (A)	*Short Circuit Current (A)	*Maximum Power Voltage (V)	*Open Circuit Voltage (V)
190	19.0-19.1	4.668	8.711	9.279	0.538	0.639
191	19.1-19.2	4.693	8.731	9.294	0.540	0.640
192	19.2-19.3	4.718	8.750	9.309	0.541	0.642
193	19.3-19.4	4.742	8.770	9.325	0.543	0.643
194	19.4-19.5	4.767	8.789	9.340	0.544	0.644
195	19.5-19.6	4.791	8.809	9.356	0.546	0.646
196	19.6-19.7	4.816	8.829	9.371	0.547	0.647
197	19.7-19.8	4.840	8.849	9.386	0.548	0.648
198	19.8-19.9	4.865	8.869	9.400	0.550	0.650
199	19.9-20.0	4.890	8.886	9.413	0.552	0.651
200	20.0-20.1	4.914	8.905	9.429	0.553	0.652
201	20.1-20.2	4.939	8.925	9.444	0.555	0.653

Test condition : 1000 W / m<sup>2</sup>, AM 1.5, 25°C      Power measuring tolerance: ±1.5% rel.


### Temperature coefficients

Current (%/K)	0.0535
Voltage (%/K)	-0.3043
Power (%/K)	-0.3718


### Light Intensity Dependence

Intensity [W/m <sup>2</sup> ]	V <sub>mpp</sub>	I <sub>mpp</sub>
1000	1.000	1.000
900	0.998	0.899
500	0.977	0.497
300	0.955	0.297
200	0.936	0.197

### IV-Curve

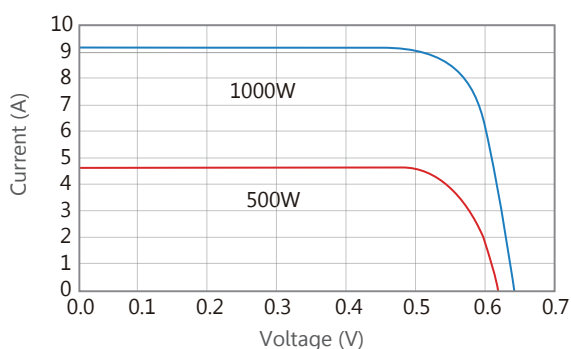

### Spectral Response

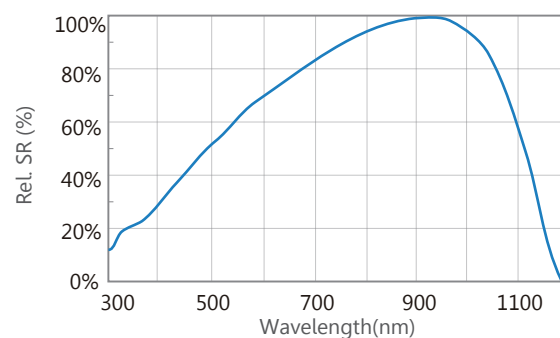

## Solartech Energy Corp.



Taipei Office  
8F., No.760, Sec. 4, Bade Rd., Songshan Dist., Taipei 105, Taiwan  
Tel: +886-2-21712388 Fax: +886-2-21712387  
E-mail: sales@solartech-energy.com

Hsinchu HQ & Fab  
No.16, Guangfu N. Rd., Hsinchu Industrial Park, Hukou, Hsinchu 303, Taiwan  
Tel: +886-3-5276888 Fax: +886-3-5276866